

UTILITY
PATENT APPLICATION
TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

Total Pages

First Named Inventor or Application Identifier

Toshiaki Kanemitsu

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☐ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total Pages 22]
(preferred arrangement set forth below)
- Descriptive title of the invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the invention
 - Brief Summary of the invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) [Total Sheets 4]
4. Oath or Declaration [Total Pages 3]
- a. ☐ Newly executed (original or copy)
 - b. ☒ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
- a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement [X] Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 [] Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☐ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☒ Small Entity [X] Statement filed in prior application, Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: 08 / 841,108

18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Labelor ☐ Correspondence address below

(Insert Customer No. or Attach bar code label here)

NAME	Felix J. D'Ambrosio				
ADDRESS	P.O. Box 2266 Eads Station				
CITY	Arlington,	STATE	VA	ZIP CODE	22202
COUNTRY	U.S.	TELEPHONE	(703) 415-1500	FAX	(703) 415-1508

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

The PTO did not receive the following listed item(s) Small Entity

Specification

Method of Producing a Rotary Member Made of a Metallic Plate

5

Technical Field

The present invention relates to a method of producing a rotary member made of a metallic plate to be used as an inner wheel of a V-pulley, a rotor of an
10 electromagnetic clutch or the like, such a rotary member being obtained by (i) integrally forming, at the center of a plate-like metallic blank, a case-like boss adapted to be put on a rotary body such as a rotary shaft, the case-like boss projecting in one di-
15 rection from one lateral side of the blank, and (ii) integrally forming, at the outer periphery of the plate-like metallic blank, a case-like peripheral wall concentrically projecting in the same direction in which the boss projects. Also, the present invention
20 relates to a method of producing a rotary member made of a metallic plate such as an unfinished intermediate part of a V-pulley or poly-V pulley made of a metallic plate, such a rotary member being obtained by integrally forming, at the center of a plate-like metallic
25 blank, only a case-like boss adapted to be put on a

rotary body such as a rotary shaft, the case-like boss projecting in one direction from one lateral side of the blank.

5

Background Art

Conventionally, a cold forging method is widely used as a method of producing a predetermined rotary member by forming, at the center of a plate-like metallic blank, only a case-like boss projecting from one lateral side of the blank, or as a method of producing a predetermined rotary member by forming, at the center of a plate-like metallic blank, a case-like boss projecting in one direction from one lateral side of the blank, and by forming, at the outer periphery of the blank, a case-like peripheral wall concentrically projecting in the same direction in which the boss projects.

The conventional cold forging method above-mentioned is adapted to form only a case-like boss, or both a case-like boss and a case-like peripheral wall with the use of a plastic flow of a material itself. There is a sheet metal product such as a rotor of an electromagnetic clutch or a V-pulley requiring a boss having a relatively small inner diameter and a relatively great projecting height, or a sheet metal product

requiring a relatively narrow annular space between a boss and a peripheral wall which are concentrically formed at inner and outer portions of the product. When producing such a sheet metal product from a thick blank in order to assure a sufficient strength, it is difficult to form such a boss having a predetermined diameter and a predetermined projecting height, or to form such a narrow annular space, even though there is used a large-size press machine of the class of 2,000 tons to 2,500 tons. Accordingly, the range in which such a product can be formed, is automatically limited by the relationship between the sizes of diameter, height and the like, and the thickness of the blank.

In view of the foregoing, the present invention is proposed with the object of providing a method of producing a rotary member made of a metallic plate, capable of forming, with high precision, only a boss or both a boss and a peripheral wall each having a predetermined diameter, a predetermined thickness and a predetermined height, with the use of a small press machine without the thickness of the initial material reduced so much in the course of production steps.

Disclosure of the Invention

To achieve the object above-mentioned, the pre-

sent invention provides a method of producing a rotary member made of a metallic plate, by which there is formed, at the center of a plate-like metallic blank, a case-like boss which projects in one direction from one lateral side of the blank, and this method comprises the steps of: curving a metallic blank such that the blank is convexed in the direction in which a boss is adapted to project; and bending, with the outer peripheral edge portion of the curved blank restrained from radially outwardly extending, the resulting arcuate portion of the blank in the direction opposite to the convex direction thereof, so that a case-like boss having a bottom and an annular flat portion are formed.

According to the method of producing a rotary member made of a metallic plate of the present invention, both the curving step of curving a metallic blank for forming a case-like boss and the bending step of bending the resulting arcuate portion of the blank, are a kind of bending operations. This restrains the blank from being reduced in thickness due to a plastic flow of the blank material, thus restraining the strength from being lowered. Further, even though the metallic blank is considerably thick, a predetermined boss can be readily formed with the

use of a relatively small-size press machine. Further, at the bending step, the outer peripheral edge portion of the blank is restrained from radially outwardly extending. This prevents the blank material from being outwardly moved, but causes the blank material to be moved toward the center of the blank. Accordingly, there can be formed a boss having a sufficient thickness and a predetermined projecting height, even though the boss has a small inner diameter.

10 The present invention also provides a method of producing a rotary member made of a metallic plate, by which a plate-like metallic blank is processed such that the blank is provided at the center thereof with a case-like boss projecting in one direction from one lateral side of the blank, and at the outer periphery thereof with a case-like peripheral wall concentrically projecting in the same direction in which the case-like boss projects, and this method comprises; a first curving step of curving a metallic blank such that the blank is convexed in the direction in which a boss is adapted to project; a bending step of bending, with the outer peripheral edge portion of the curved blank restrained from radially outwardly extending, the resulting arcuate portion of the curved blank in the direction opposite to the convex direction there-

15

20

25

of, so that a case-like boss having a bottom and an annular flat portion are formed; and a second curving step of pushing, with the case-like boss having the bottom restrained from being deformed, the inner peripheral portion of the annular flat portion in the direction opposite to the direction in which the case-like boss projects, so that a case-like peripheral wall is formed, as upwardly standing, at the outer periphery of the flat portion.

10 According to the method of producing a rotary member made of a metallic plate of the present invention, all the first curving step of curving a metallic blank for forming a case-like boss, the bending step of bending the resulting arcuate portion of the blank
15 and the second curving step of pushing the flat portion to form a case-like peripheral wall, are a kind of bending operations. This restrains the blank from being reduced in thickness due to a plastic flow of the blank material, thus restraining the strength from
20 being lowered. Further, even though the metallic blank is considerably thick, a predetermined boss and a predetermined peripheral wall can be readily formed with the use of a relatively small-size press machine. Further, at the bending step, the outer peripheral edge
25 portion of the blank is restrained from radially out-

wardly extending. This prevents the blank material from being outwardly moved, but causes the blank material to be moved toward the center of the blank. Accordingly, there can be formed a boss having a sufficient thickness and a predetermined projecting height, even though the boss has a small inner diameter. Further, at the second curving step, the boss formed at the bending step is restrained from being deformed. This prevents the blank material from being moved both inwardly and outwardly. Thus, the boss can be prevented from being deformed, and the peripheral wall having a sufficient thickness can be formed. Further, the outer peripheral edge of the blank is restrained from radially outwardly extending, and the boss is restrained from being deformed. This improves the dimensional precision of the resulting product in its entirety.

The method according to the present invention may further comprise, after the bending step, a finishing step of axially compressing the bottom of the case-like boss formed at the bending step such that the bottom becomes flat and is located at a predetermined projecting height. In such an arrangement, the boss having a predetermined projecting height can be finished with higher precision. Further, a boss por-

tion which projects excessively in the height direction, can be axially compressed to cause the boss to be thickened. This is more advantageous in view of the strength of the boss.

5 The method according to the present invention may further comprise, after the second curving step, a cutting step of cutting the projecting end portion of the case-like boss having the bottom formed at the bending step, thus forming a shaft insertion hole in
10 the case-like boss. In such an arrangement, even though there occur errors about dimensional precision at the curving and/or bending steps, such errors can be absorbed, thus ultimately providing a rotary member of which dimensional precision is very high.

15

Brief Description of the Drawings

Figure 1A and Figure 1B are section views of main portions of a first sub-step of a first curving (drawing) step in a method of producing a rotary member made of a metallic plate according to an embodiment of the present invention;
20

Figure 2A and Figure 2B are section views of main portions of a second sub-step of the first curving (drawing) step in the method above-mentioned;

25 Figure 3A and Figure 3B are section views of

main portions of a first bending (squeezing) step in the method above-mentioned;

Figure 4A and Figure 4B are section views of main portions of a second bending (squeezing) step in
5 the method above-mentioned;

Figure 5A and Figure 5B are section views of main portions of a third bending (squeezing) step in the method above-mentioned;

Figure 6A and Figure 6B are section views of
10 main portions of a fourth bending (squeezing) step in the method above-mentioned;

Figure 7A and Figure 7B are section views of main portions of a second curving (drawing) step in the method above-mentioned;

15 Figure 8A and Figure 8B are a vertical section view and a plan view of a rotary member made of a metallic plate produced by the method of the present invention;

Figure 9 is a vertical section view of a rotary
20 member made of a metallic plate produced by the method of the present invention, as assembled as a rotor of an electromagnetic clutch;

Figure 10 is a vertical section view of a rotary member made of a metallic plate produced by the method
25 of the present invention, as assembled as an inner

wheel of a V-pulley; and

Fig. 11 is a vertical section view of a product produced by the method of producing a rotary member made of a metallic plate according to another embodiment of the present invention.

Best Mode for Carrying Out the Invention

The following description will discuss a method of producing a rotary member made of a metallic plate according to an embodiment of the present invention, in the form of a method of producing a rotor to be used as assembled in an electromagnetic clutch. In this embodiment, using a circular plate-like metallic blank having a thickness t of about 3 to about 5, there is formed a rotor for an electromagnetic clutch having (i) a boss of which inner diameter d_1 is about 60 mm and of which projecting height h is in the range from about 28 to about 32 mm, and (ii) a peripheral wall of which outer diameter d_2 is in the range from about 120 to about 150 mm.

Fig. 1A shows a first sub-step of a first curving (drawing) step. As shown in Fig. 1A, a circular flat metallic blank 1 is set on a lower mold 2 having a punch 2a and a punch holder 2b, and a press machine (not shown) is operated such that the lower mold 2 and

an upper mold 3 having a die 3a and a die holder 3b approach to each other. As shown in Fig. 1B, the metallic blank 1 is then drawn in its entirety in the boss projecting direction such that the metallic blank 1 is convexly curved in two stages. The shape in which the metallic blank 1 is curved, is determined by the tip shape of the punch 2a of the lower mold 2 and an inlet tapering surface 3bl of the die holder 3b of the upper mold 3.

10 As shown in Fig. 2A and Fig. 2B in which a second sub-step of the first curving (drawing) step is shown, there are used (i) a punch 2a of which tip shape is different from that of the punch 2a used in the first sub-step, and (ii) a die holder 3b of which
15 inlet tapering surface 3bl is different from that of the die holder 3b used in the first sub-step. Likewise in the first sub-step, the press machine is operated such that an upper mold 3 and a lower mold 2 approach to each other, thus drawing the metallic blank 1 substantially in the form of a cone.
20

Then, the sequence proceeds to bending (squeezing) steps for forming a case-like boss. As shown in Fig. 3A, Fig. 3B to Fig. 6A, Fig. 6B, the bending (squeezing) steps include first to fourth steps. In
25 each of these first to fourth bending steps, there are

used dedicated lower and upper squeezing molds 12, 13 which are different from those used at the first curving (drawing) step in the projecting amount and tip curvature of a punch 12a of each lower mold 12 and in the curvature of the inlet corner portion 13b2 of a die holder 13b of each upper mold 13. In the bending (squeezing) steps, the upper and lower molds 13, 12 are caused to approach to each other so that an arcuate portion 1b of the blank 1 is squeezed and bent in the direction opposite to the convex direction thereof. As a result, the arcuate portion 1b is deformed along the outer peripheral surface of each punch 12a, thus forming (i) a case-like boss 6 having a bottom at the center of the blank 1 and (ii) an annular flat portion 5 at the outer periphery of the case-like boss 6.

At the fourth bending step shown in Fig. 6A and Fig. 6B, out of the plurality of bending steps, a boss finishing process is carried out. More specifically, with the use of a dedicated finishing punch 12a2 and a dedicated finishing die holder 13b2, the bottom 6a of the case-like boss 6 is axially compressed such that the bottom 6a of the case-like boss 6 becomes flat and is located at a predetermined height.

In each of the plurality of bending steps, an

outer peripheral edge portion 1e of the blank 1 comes in contact with the inner surface of an annular projection 12c of the punch holder 12b of each lower mold 12. Accordingly, the outer peripheral edge portion 1e is always restrained from radially outwardly extending. This perfectly prevents the material of the blank 1 from flowing in the radially outward direction, but causes the material of the blank 1 to flow toward the case-like boss 6. Accordingly, the case-like boss 6 can be securely thickened and the linear portion of the case-like boss 6 can be securely lengthened.

Then, the sequence proceeds to a second curving (drawing) step for forming, at the outer periphery of the blank 1, a peripheral wall concentric with the case-like boss 6. At the second curving (drawing) step in Fig. 7A, the blank 1 having the case-like boss 6 and the annular flat portion 5 is set on a lower mold 22 having (i) a center projecting portion 22a which has an outer diameter substantially equal to the inner diameter of the case-like boss 6 and of which top surface is flat, and (ii) an annular movable portion 22b slidably fitted to and held by the center projecting portion 22a. An upper mold 23 has a case-like projecting portion 23a of which inner diameter substantially equal to the outer diameter of the case-like boss 6

and of which thickness is equal to about a half of the radial distance of the annular flat portion 5. The upper mold 23 also has a column portion 23b fitted in and secured to the case-like projecting portion 23a such that the tip surface of the column portion 23b is located in a position which is depressed, from the tip of the case-like projecting portion 23a, by a distance corresponding to the projecting height of the case-like boss 6. The press machine is operated such that the upper mold 23 and the lower mold 22 approach to each other. Accordingly, as shown in Fig. 7B, while the center projecting portion 22a of the lower mold 22 is moved as coming in close contact with the inside of the case-like boss 6 to restrain the deformation of the case-like boss 6, the inner peripheral portion of the annular flat portion 5 is pushed down in the direction opposite to the direction in which the boss 6 project, and a case-like peripheral wall 7 is formed, at the outer periphery of the annular flat portion 5, as standing and projecting in the same direction in which the boss 6 projects. In this second curving (drawing) step, the case-like boss 6 is restrained from being deformed because the center projecting portion 22a of the lower mold 22 is fittingly moved inside of the case-like boss 6. This prevents the mate-

rial of the blank 1 from flowing in both inward and outward directions. This not only prevents the boss 6 from being deformed, but also enables the peripheral wall 7 to be made sufficiently thick.

5 After completion of the steps above-mentioned, the projecting end portion including the bottom 6a of the case-like boss 6, is cut such that the projecting end portion has a predetermined projecting height h, thus forming a shaft insertion hole 8 in the boss 6.
10 Accordingly, as shown in Fig. 8A and Fig. 8B, there is produced a rotor R for an electromagnetic clutch having the sizes above-mentioned.

 The rotor R thus produced is so used as to form a predetermined electromagnetic clutch. More specifically, as shown in Fig. 9, a rotary shaft 11 is rotatably inserted and fitted, through a bearing 10, in the shaft insertion hole 8 formed in the case-like boss 6 at the center thereof, and a core 15 for an electromagnetic clutch is assembled in an annular
15 space 14 which is formed between the boss 6 and the peripheral wall 7 and which is opened in one direction. A rotation transmitting wheel 17 such as a poly-V pulley is securely connected to the outer periphery of the peripheral wall 7 through bolts 16. An
20 armature 18 or the like integrally rotatable with the
25

rotary shaft 11 is disposed at the outer-surface side of the flat portion 5 of the rotor R.

When using the rotary member of the present invention as the rotor for an electromagnetic clutch
5 above-mentioned, it is preferable to form arcuate heat radiating holes 19 in the flat portion 5, as shown in Fig. 8B. Such holes 19 increase heat radiation from the annular space 14 in which the core 15 is to be incorporated.

10 In the embodiment above-mentioned, the description has been made of the method of producing a rotary member made of a metallic plate adapted to be used as a rotor for an electromagnetic clutch. However, a product to be produced by the method of the present in-
15 vention is not limited to such a rotor. For example, the method of the present invention may be applied for production of a rotary member to be used as an inner wheel of a V-pulley 19 as shown in Fig. 10.

Fig. 11 is a vertical section view of an un-
20 finished intermediate part 20 of a V-pulley or poly-V pulley made of a metallic plate produced by the method of the present invention. This unfinished intermediate part 20 may be produced through steps similar to those shown in Fig. 1A, 1B to Fig. 6A, 6B. More specifical-
25 ly, a blank is so processed as to be provided at the

center thereof with a case-like boss 6 having a bottom
and at the outer periphery thereof with a flat portion
5. Then, the projecting end portion including the bot-
tom (at the upper end side in Fig. 11) of the case-
5 like boss 6, is cut such that the projecting end por-
tion has a predetermined projecting height h, or the
bottom (at the upper end side in Fig. 11) of the
case-like boss 6 is punched, thus forming a shaft in-
sertion hole 8 in the case-like boss 6 at the center
10 thereof.

Industrial Applicability

The method of producing a rotary member made of
a metallic plate of the present invention, is tech-
15 nology of integrally forming, at the center of a
plate-like metallic blank, only a case-like boss which
projects in one direction from one lateral side of the
blank, or integrally forming both such a case-like
boss and a case-like peripheral wall at the outer pe-
20 riphery of the plate-like metallic blank, the periphe-
ral wall concentrically projecting in the same direc-
tion in which the case-like boss projects. More speci-
fically, with the use of a small press machine, there
can be securely formed, with high precision, only a
25 boss or both a boss and a peripheral wall, each of

which has a desired diameter, a desired thickness and a desired projecting height, such formation being made by combining kinds of bending operations so that the original thickness of the blank is not decreased so much in the course of production steps. This produc-

5 tion technology can be effectively utilized for producing a rotor for an electromagnetic clutch, a V-pulley and the like.

005780" 081500

What is Claimed is:

1. In a method of producing a rotary member made of a metallic plate by which there is formed, at the center of a plate-like metallic blank, a case-like boss which projects in one direction from one lateral side of the blank,

said method comprising the steps of:

curving a metallic blank such that said blank is convexed in the direction in which a boss is adapted to project; and

bending, with the outer peripheral edge portion of said curved blank restrained from radially outwardly extending, the resulting arcuate portion of said curved blank in the direction opposite to the convex direction thereof, so that a case-like boss having a bottom and an annular flat portion are formed.

2. In a method of producing a rotary member made of a metallic plate by which a plate-like metallic blank is processed such that the blank is provided at the center thereof with a case-like boss projecting in one direction from one lateral side of the blank, and at the outer periphery thereof with a case-like peripheral wall concentrically projecting in the same di-

rection in which the case-like boss projects,

said method comprising;

a first curving step of curving a metallic blank
such that said blank is convexed in the direction in
5 which a boss is adapted to project;

a bending step of bending, with the outer peri-
pheral edge portion of said curved blank restrained
from radially outwardly extending, the resulting arcu-
ate portion of said curved blank in the direction op-
10 posite to the convex direction thereof, so that a
case-like boss having a bottom and an annular flat
portion are formed; and

a second curving step of pushing, with said
case-like boss having the bottom restrained from being
15 deformed, the inner peripheral portion of said annular
flat portion in the direction opposite to the direc-
tion in which said case-like boss projects, so that a
case-like peripheral wall is formed.

20 3. A method of producing a rotary member made of
a metallic plate according to Claim 1, further com-
prising, after the bending step, a finishing step of
axially compressing the bottom of the case-like boss
formed at said bending step such that said bottom be-
25 comes flat and is located at a predetermined project-

ing height.

4. A method of producing a rotary member made of a metallic plate according to Claim 2, further comprising, after the bending step, a finishing step of axially compressing the case-like boss having the bottom formed at said bending step such that said bottom becomes flat and is located at a predetermined projecting height.

10

5. A method of producing a rotary member made of a metallic plate according to Claim 2, further comprising, after the second curving step, a cutting step of cutting the projecting end portion of the case-like boss having the bottom formed at the bending step, thus forming a shaft insertion hole therein.

15

6. A method of producing a rotary member made of a metallic plate according to Claim 3, further comprising, after the second curving step, a cutting step of cutting the projecting end portion of the case-like boss having the bottom formed at the bending step, thus forming a shaft insertion hole therein.

20

Abstract

00538077 001300
00538077 001300

The method according to the present invention comprises: a first curving step of curving a plate-like metallic blank (1) such that the blank (1) is
5 convexed; a bending step of bending, with the outer peripheral edge portion (1e) of the blank (1) restrained from radially outwardly extending, the resulting arcuate portion (1b) of the curved blank (1)
10 in the direction opposite to the convex direction thereof, so that a boss (6) is formed; and a second curving step of pushing the inner peripheral portion of a flat portion (5) of the blank (1) in the direction opposite to the boss projecting direction.
15 Through the steps above-mentioned, the blank (1) is provided at the center thereof with the case-like boss (6) projecting in one direction from one lateral side of the blank (1) and at the outer periphery thereof with a peripheral wall (7) projecting in the same direction in which the boss (6) projects. Thus, with a
20 small press machine, there can be securely formed, with high precision, a boss having a desired diameter and a desired projecting height, without the original thickness of the blank (1) decreased so much in the
25 course of production steps.

005180" 26086960

Fig.1A

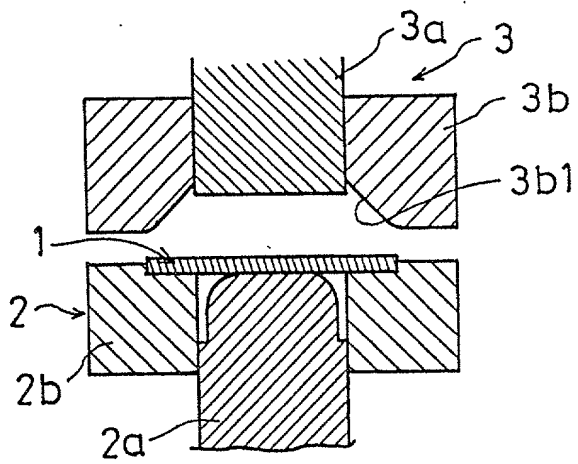


Fig.1B

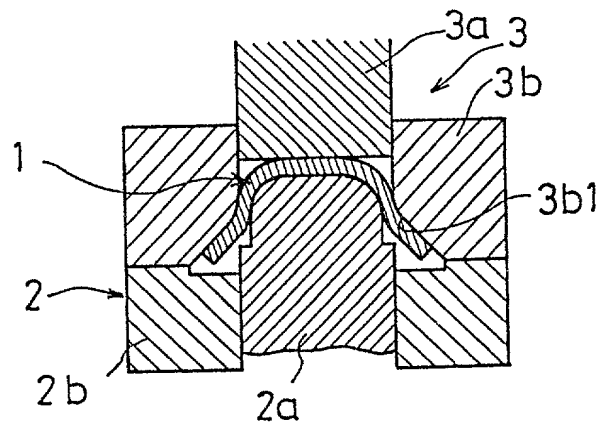


Fig.2A

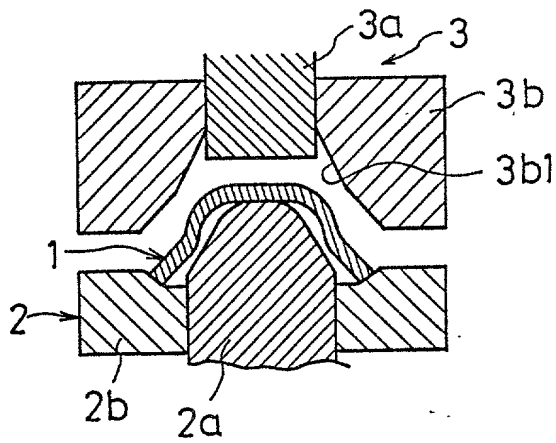


Fig. 2B

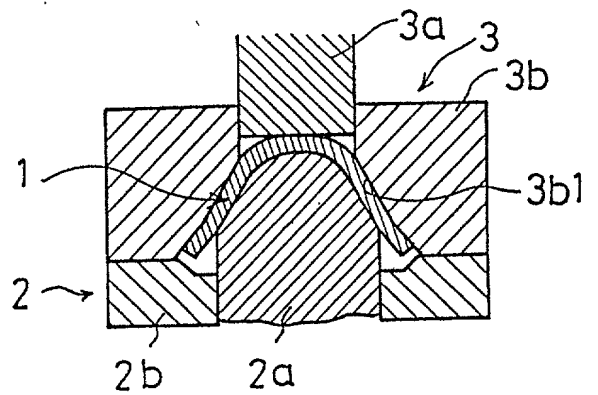


Fig.3A

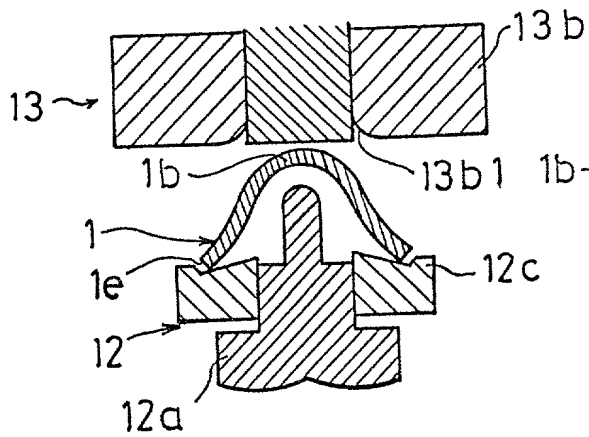


Fig.3B

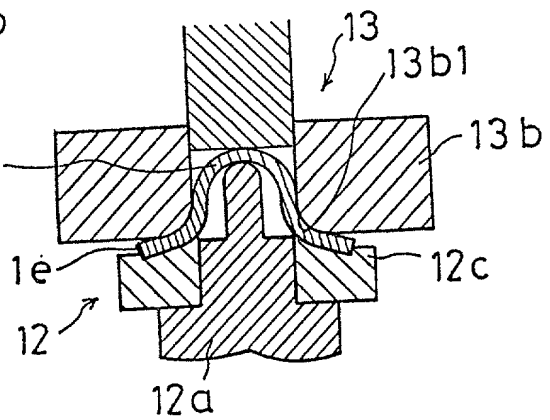


Fig.4A

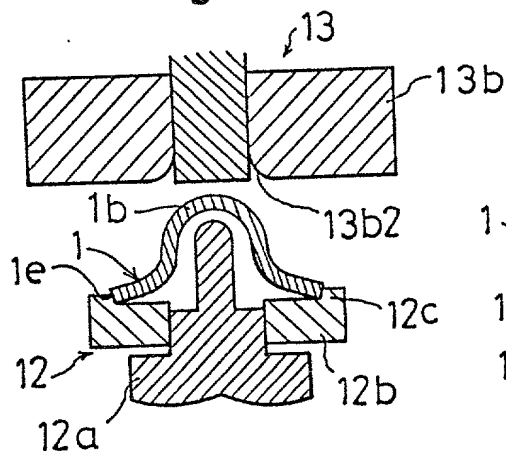


Fig.4B

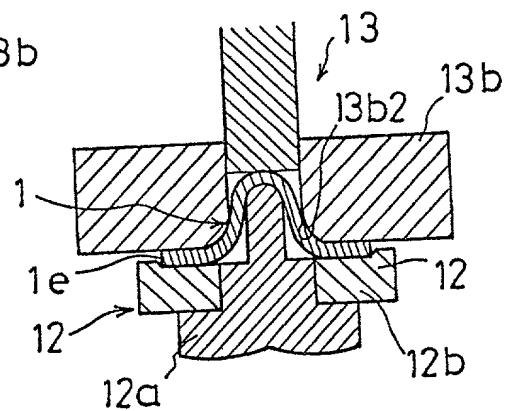


Fig.5A

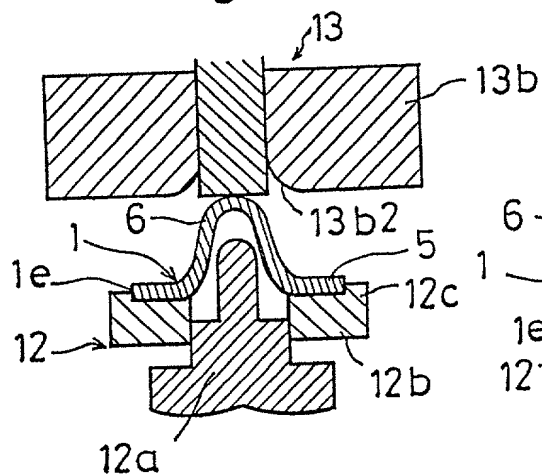


Fig.5B

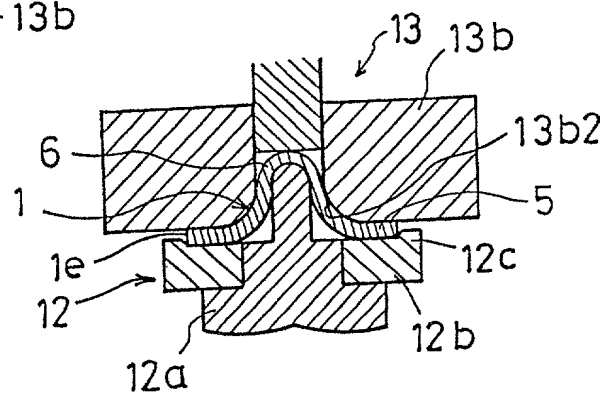


Fig.6A

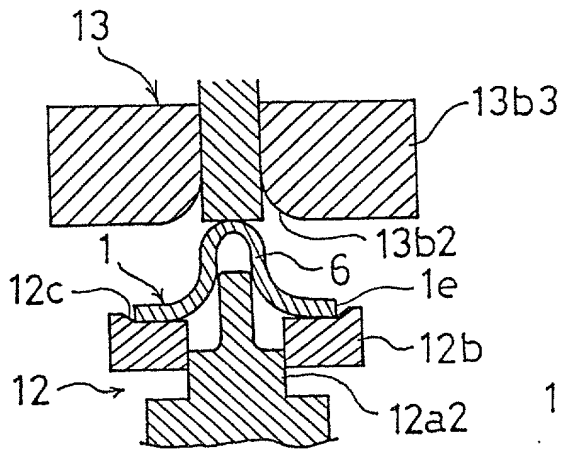


Fig.6B

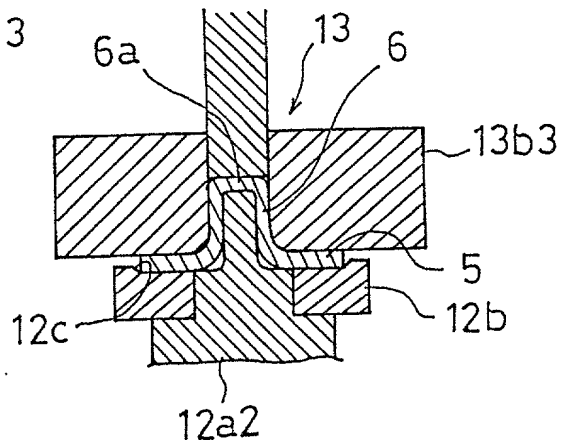


Fig.7A

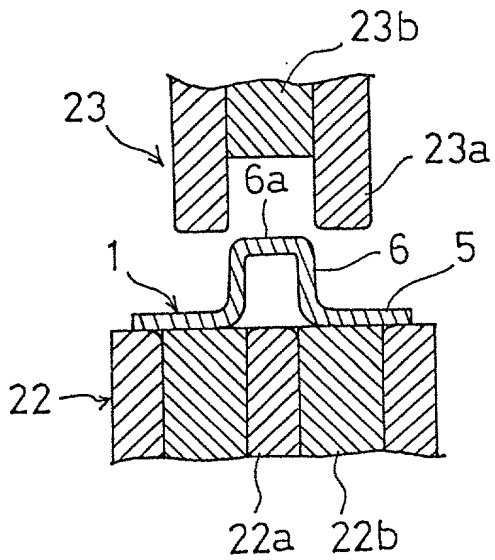


Fig.7B

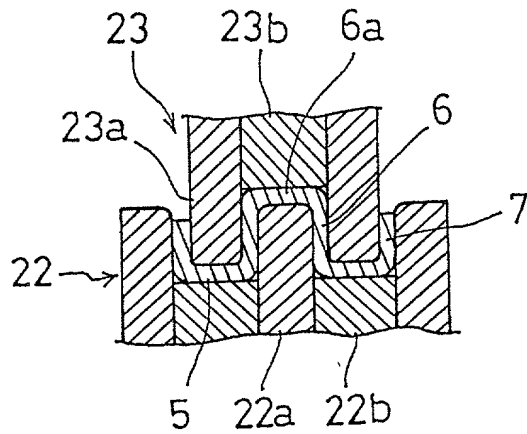


Fig.8A


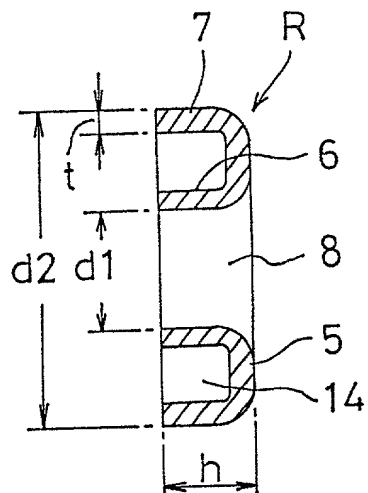


Fig.8B

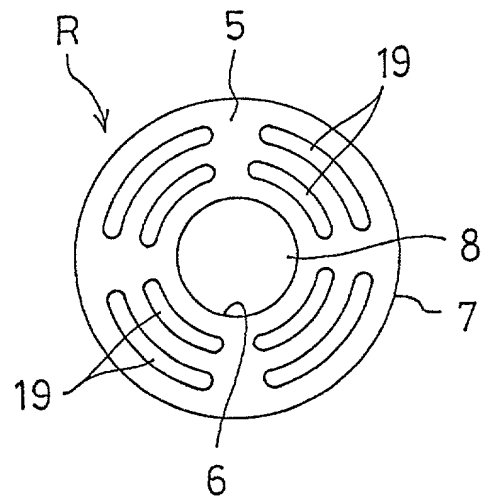

005180" 2508E960

Fig.9

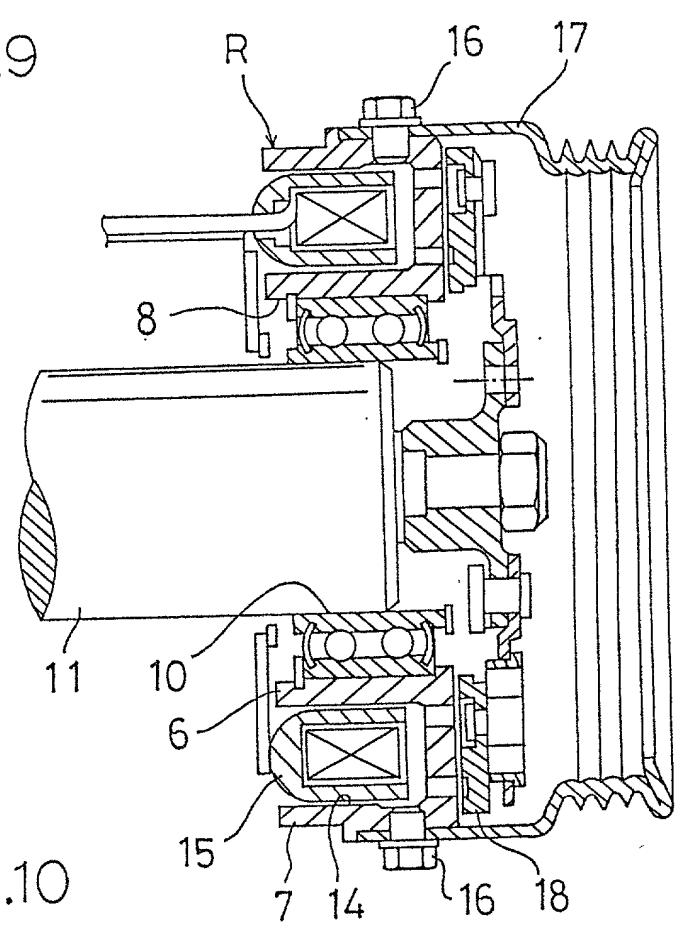


Fig.10


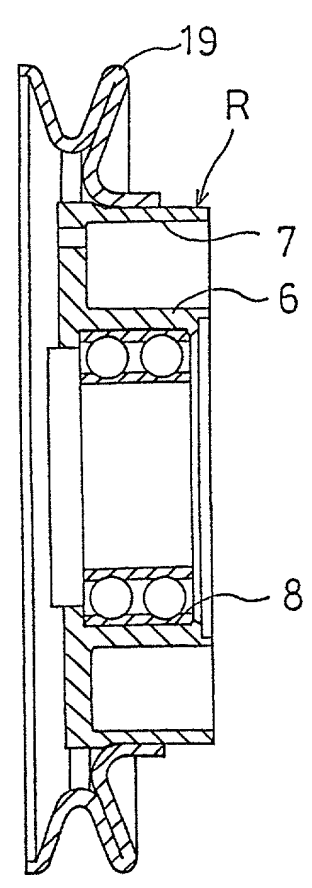


Fig.11

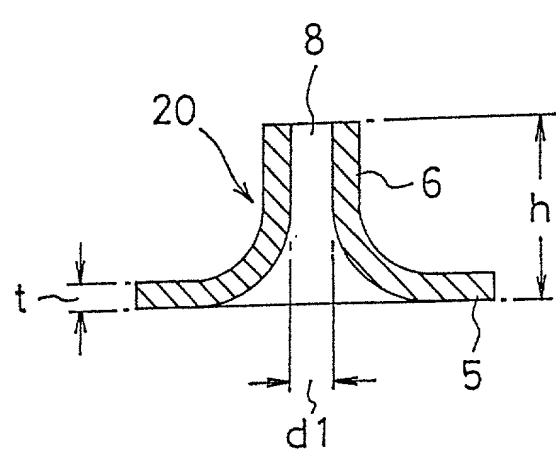

005720" 2003E960

COPY

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

This declaration is of the following type:

- ☐ original
- ☐ design
- ☐ supplemental
- ☒ national stage of PCT
- ☐ divisional
- ☐ continuation
- ☐ continuation-in-part (CIP)

My residence, post office address and citizenship are as stated next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed for and for which a patent is sought on the invention entitled:

Method of producing a rotary member made of a metallic plate

the specification of which

- ☐ is attached hereto
- ☐ was filed on _____, as
Application Serial No. _____
and was amended on _____
(if applicable)
- ☒ was described and claimed in PCT International application
No. PCT/JP92/00508 filed on April 20, 1992
and as amended under PCT Article 19 on _____
(if any).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any Amendment referred to above.

I acknowledge duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56.

- ☐ In compliance with this duty there is attached an information disclosure statement. 37 CFR 1.97.

I hereby claim foreign priority benefits under Title 35, United States Code, Sec. 119, of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent of inventor's certificate having a filing date before that of the application on which priority is claimed:

[] no such applications have been filed
[] such applications have been filed as follows.

Prior Foreign Application(s)

<u> </u>	<u> </u>	<u> </u>	[]	[]
(Number)	(Country)	(day/month/year filed)	Yes	No
<u> </u>	<u> </u>	<u> </u>	[]	[]
(Number)	(Country)	(day/month/year filed)	Yes	No

I hereby claim the benefit under Title 35, United States Code, Sec. 120 of any United States application(s) listed below, and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Sec. 112, I acknowledge the duty to disclose all information known to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

<u> </u>	<u> </u>	<u> </u>
(Application Serial No.)	(Filing Date)	(patented, pending, abandoned)
<u> </u>	<u> </u>	<u> </u>
(Application Serial No.)	(Filing Date)	(patented, pending, abandoned)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

George M. Cooper, Reg. No. 20,201	Eric S. Spector, Reg. No. 22,495
Felix J. D'Ambrosio, Reg. No. 25,721	Douglas R. Hanscom, Reg. No. 26,600
James W. Hellwege, Reg. No. 28,808	William A. Blake, Reg. No. 30,548
	John P. Foryt Reg. No. 32,866

Send correspondence to

Felix J. D'Ambrosio
JONES, TULLAR & COOPER, P.C.
P.O. Box 2266 Eads Station
Arlington, VA 22202

Direct telephone calls

TO:

(703) 415-1500

005180-2208360

1990-1991 1991-1992 1992-1993 1993-1994 1994-1995 1995-1996 1996-1997 1997-1998 1998-1999 1999-2000 2000-2001 2001-2002 2002-2003 2003-2004 2004-2005 2005-2006 2006-2007 2007-2008 2008-2009 2009-2010 2010-2011 2011-2012 2012-2013 2013-2014 2014-2015 2015-2016 2016-2017 2017-2018 2018-2019 2019-2020 2020-2021 2021-2022 2022-2023 2023-2024 2024-2025 2025-2026 2026-2027 2027-2028 2028-2029 2029-2030 2030-2031 2031-2032 2032-2033 2033-2034 2034-2035 2035-2036 2036-2037 2037-2038 2038-2039 2039-2040 2040-2041 2041-2042 2042-2043 2043-2044 2044-2045 2045-2046 2046-2047 2047-2048 2048-2049 2049-2050 2050-2051 2051-2052 2052-2053 2053-2054 2054-2055 2055-2056 2056-2057 2057-2058 2058-2059 2059-2060 2060-2061 2061-2062 2062-2063 2063-2064 2064-2065 2065-2066 2066-2067 2067-2068 2068-2069 2069-2070 2070-2071 2071-2072 2072-2073 2073-2074 2074-2075 2075-2076 2076-2077 2077-2078 2078-2079 2079-2080 2080-2081 2081-2082 2082-2083 2083-2084 2084-2085 2085-2086 2086-2087 2087-2088 2088-2089 2089-2090 2090-2091 2091-2092 2092-2093 2093-2094 2094-2095 2095-2096 2096-2097 2097-2098 2098-2099 2099-2100 2100-2101 2101-2102 2102-2103 2103-2104 2104-2105 2105-2106 2106-2107 2107-2108 2108-2109 2109-2110 2110-2111 2111-2112 2112-2113 2113-2114 2114-2115 2115-2116 2116-2117 2117-2118 2118-2119 2119-2120 2120-2121 2121-2122 2122-2123 2123-2124 2124-2125 2125-2126 2126-2127 2127-2128 2128-2129 2129-2130 2130-2131 2131-2132 2132-2133 2133-2134 2134-2135 2135-2136 2136-2137 2137-2138 2138-2139 2139-2140 2140-2141 2141-2142 2142-2143 2143-2144 2144-2145 2145-2146 2146-2147 2147-2148 2148-2149 2149-2150 2150-2151 2151-2152 2152-2153 2153-2154 2154-2155 2155-2156 2156-2157 2157-2158 2158-2159 2159-2160 2160-2161 2161-2162 2162-2163 2163-2164 2164-2165 2165-2166 2166-2167 2167-2168 2168-2169 2169-2170 2170-2171 2171-2172 2172-2173 2173-2174 2174-2175 2175-2176 2176-2177 2177-2178 2178-2179 2179-2180 2180-2181 2181-2182 2182-2183 2183-2184 2184-2185 2185-2186 2186-2187 2187-2188 2188-2189 2189-2190 2190-2191 2191-2192 2192-2193 2193-2194 2194-2195 2195-2196 2196-2197 2197-2198 2198-2199 2199-2200 2200-2201 2201-2202 2202-2203 2203-2204 2204-2205 2205-2206 2206-2207 2207-2208 2208-2209 2209-2210 2210-2211 2211-2212 2212-2213 2213-2214 2214-2215 2215-2216 2216-2217 2217-2218 2218-2219 2219-2220 2220-2221 2221-2222 2222-2223 2223-2224 2224-2225 2225-2226 2226-2227 2227-2228 2228-2229 2229-2230 2230-2231 2231-2232 2232-2233 2233-2234 2234-2235 2235-2236 2236-2237 2237-2238 2238-2239 2239-2240 2240-2241 2241-2242 2242-2243 2243-2244 2244-2245 2245-2246 2246-2247 2247-2248 2248-2249 2249-2250 2250-2251 2251-2252 2252-2253 2253-2254 2254-2255 2255-2256 2256-2257 2257-2258 2258-2259 2259-2260 2260-2261 2261-2262 2262-2263 2263-2264 2264-2265 2265-2266 2266-2267 2267-2268 2268-2269 2269-2270 2270-2271 2271-2272 2272-2273 2273-2274 2274-2275 2275-2276 2276-2277 2277-2278 2278-2279 2279-2280 2280-2281 22	
---	--

Post Office Address _____